








Cable

Male


Female

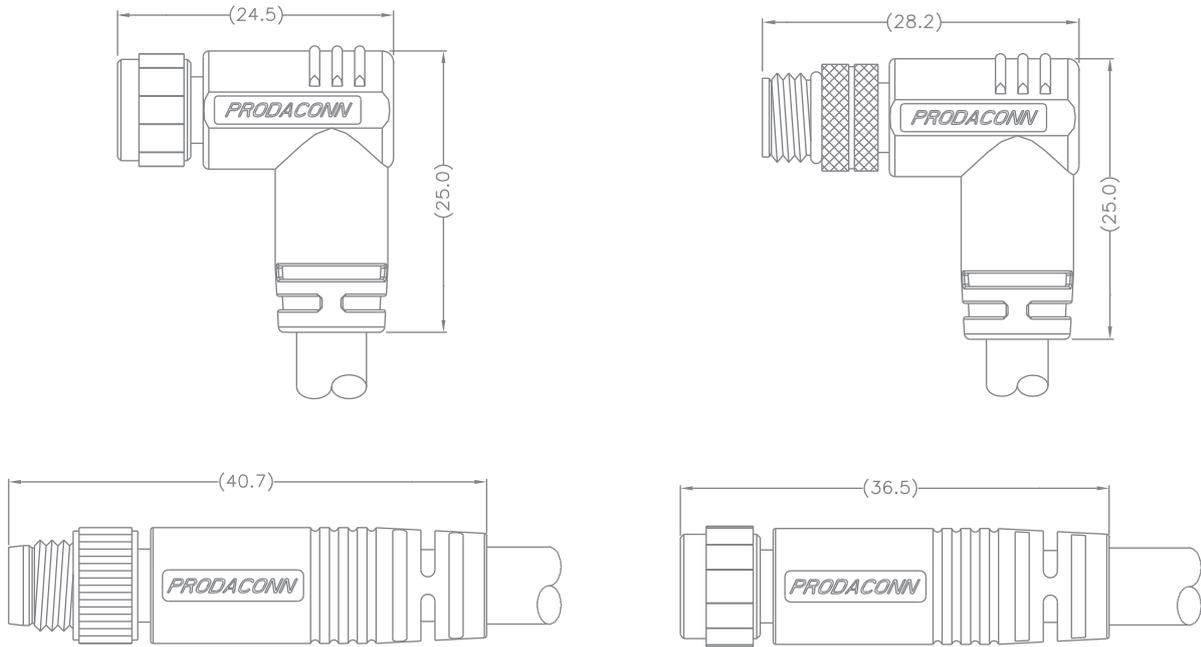


Panel-Dip Front mount

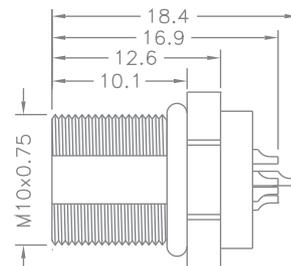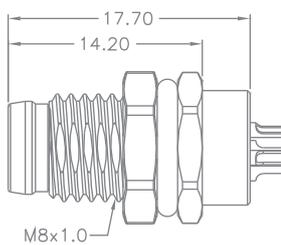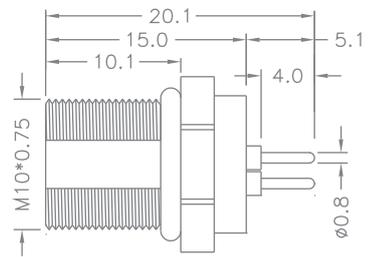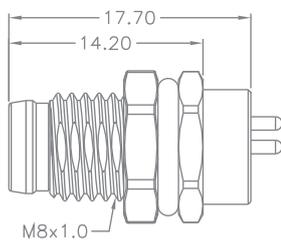

Panel-Solder Rear mount

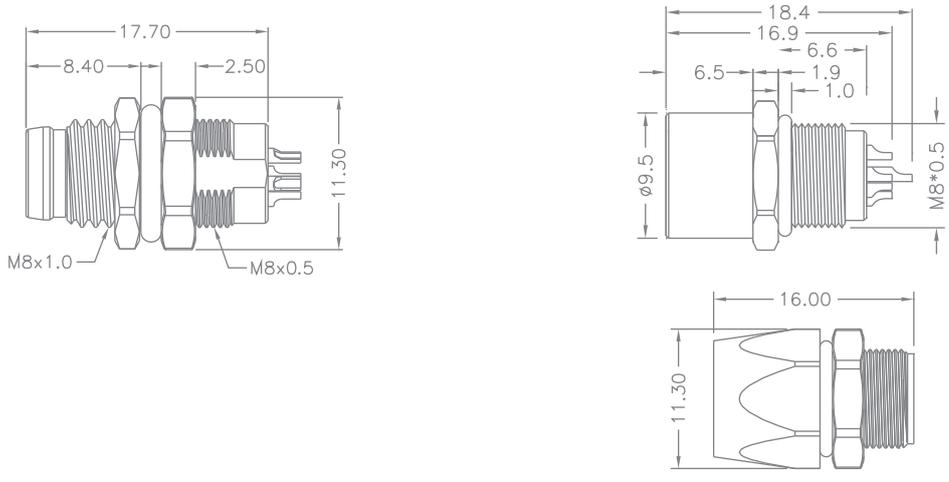


Panel-Dip Rear mount

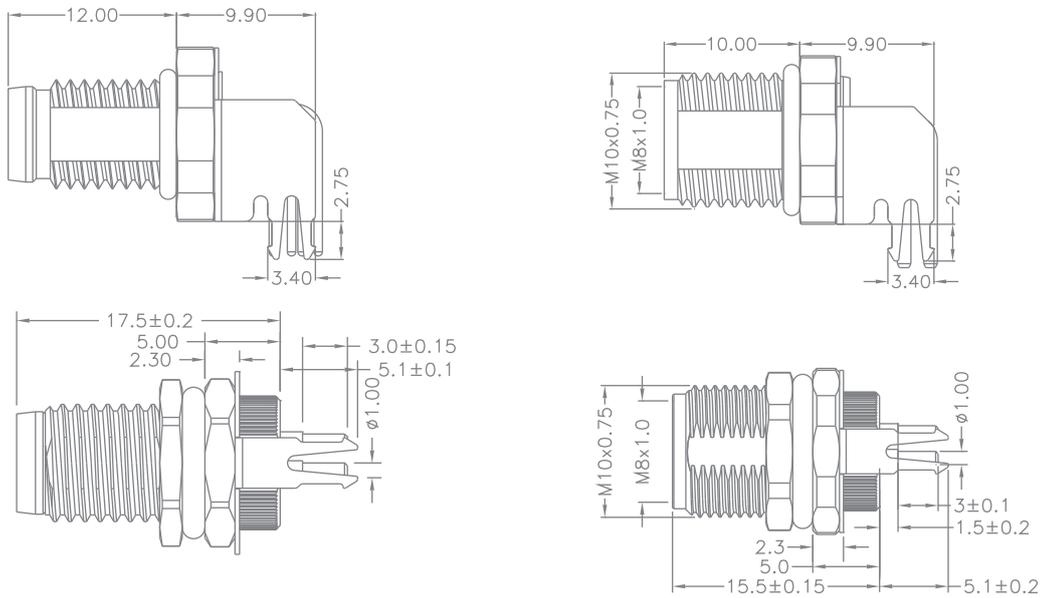

Technical Characteristics

- Shell material : Brass / Zinc
- Housing material : Nylon PA66
- Molding material : PVC / TPU
- Contact : Copper Alloy
- Applicable temperature : -40°C~+105°C
- Insulation resistance : $\geq 100\text{m}\Omega$
- Contact resistance : $\leq 5\text{m}\Omega$
- Protection level : IP67
- Mating and Unmating force : ≥ 500

Panel Cut-Out

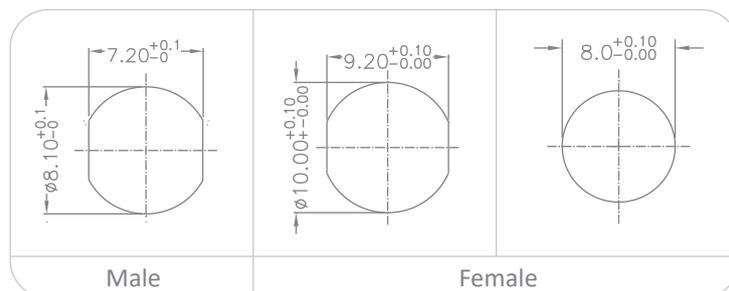

Electrical Features

02
M8

Female						
Male						
Pin Way	3PIN	4PIN	6PIN	8PIN	5PIN	4PIN
	A				B	D
Rated Current	3A		1A		3A	4A
Rated Voltage	60V a.c./ 60V d.c.		30V a.c./30V d.c.		30V a.c./30V d.c.	50V a.c./60V d.c.
Conductor	24AWG		26AWG		22AWG	22AWG
Cable	PVC / PUR					

Part Numbering System

