



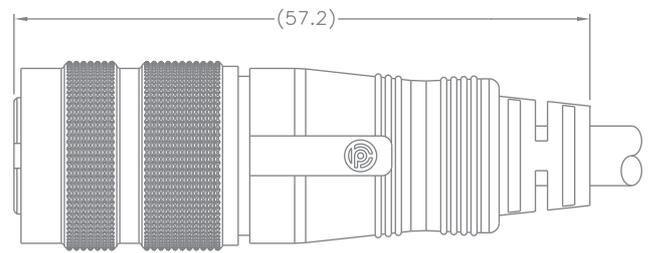



**Cable**

Male


Female

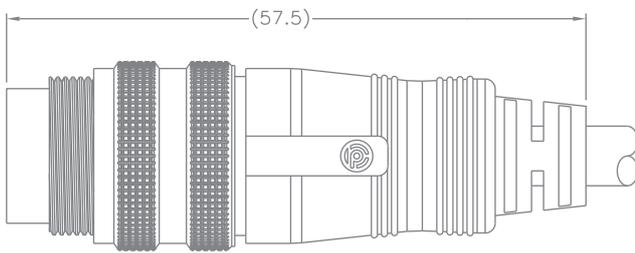

**Panel-Solder Front mount**



**Panel Cut-Out**

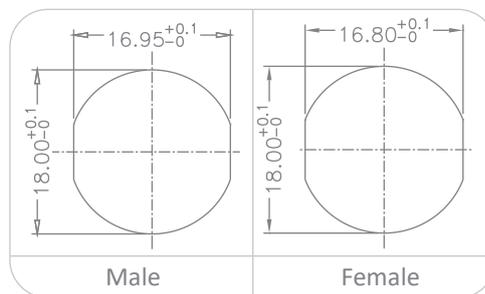

**Technical Characteristics**

- Shell material : Brass / Zinc
- Housing material : Nylon PA66
- Molding material : PVC / TPU
- Contact : Copper Alloy
- Applicable temperature : -20°C~+80°C
- Insulation resistance :  $\geq 100\text{m}\Omega$
- Contact resistance :  $\leq 5\text{m}\Omega$
- Protection level : IP67
- Mating and Unmating force :  $\geq 500$

Electrical Features

Female						
Male						
Pin Way	3PIN	4PIN	5PIN	6PIN	7PIN	8PIN
Rated Current	7A	6A		5A		
Rated Voltage	250V a.c./ 250V d.c.				125V a.c./ 125V d.c.	
Conductor	20AWG					
Cable	PVC / PUR					

Part Numbering System

