



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2023/03/25	Ann	New Item

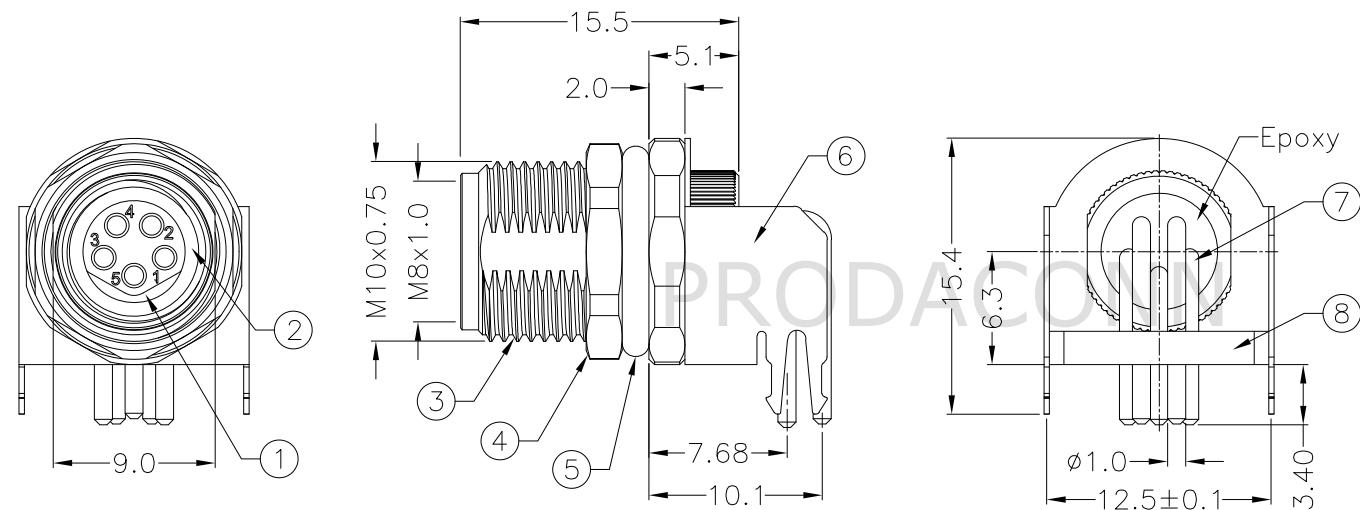


- Note:
- ① * Housing: Nylon,Black
 - ② * O-Ring1: Rubber,Black
 - ③ * Shell1: Copper Alloy,Nickel Plated
 - ④ * Nut: Copper Alloy,Nickel Plated
 - ⑤ * O-Ring2: Rubber,Black
 - ⑥ * Shell2: Copper Alloy,Nickel Plated
 - ⑦ * Female Pin: Copper Alloy,Gold Plated
 - ⑧ * Locking Plate: LCP


- Recommendation:
- * Waterproof Rate: IP67
 - * Rated Current: 3A
 - * Rated Voltage: 30V AC/DC
 - * Temperature Rating: -40°C~80°C



Pin Assignments
Front View

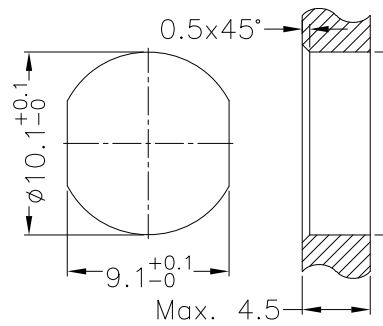

Recommend
Panel Cut-Out

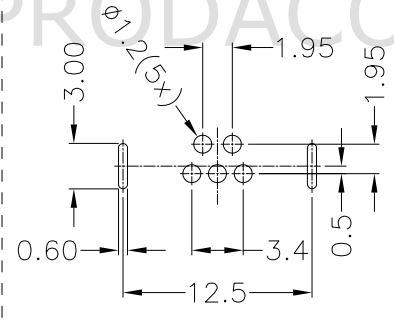

Recommend
PCB Layout



PRODACONN

TOLERANCE UNLESS OTHERWISE SPECIFIED		REV. A	
.X	±0.25	SCALE 1:1	
.XX	±0.1		
.XXX	±0.05		
ANGLES	±1°		

DRAWN BY	APPROVED BY	DATE(Y/M/D)	PAGE	SIZE
Ann	Roy	2023/03/25	1/1	A4

PART NO:	TITLE		
M8B05-S08F-RDS-J0	M8 B-CODE FEMALE DIP TYPE		
CUSTOMER NO:			

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN.