

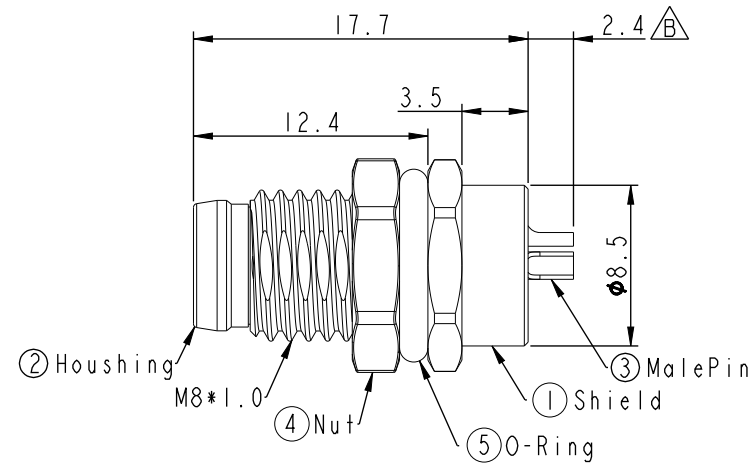



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2024/08/27	Delu	New Item
B		2024/09/04	Delu	Modify Size




Note:  
 \* Waterproof Rate: IP67  
 Material:  
 ① Shield: Copper Alloy, Nickel Plated.  
 ② Housing: Nylon+GF, Black.  
 ③ Male Pin: Copper Alloy, Gold Plated.  
 ④ Nut: Copper Alloy, Nickel Plated.  
 ⑤ O-Ring: EDPM, Black.

Electrical Characteristics:  
 Current rating: 3&4PIN:3A  
 6&8PIN:1.5A  
 Voltage rating: 3&4PIN:50Va.c./60Vd.c.  
 6&8PIN:30Va.c./30Vd.c.

Recommendation:  
 \* For Panel Thickness Max 3.0mm.  
 \* Nut Torque: 4-6kgf.cm.

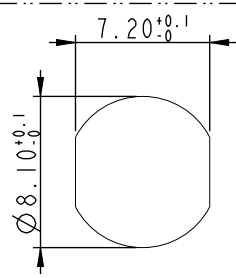

Panel Cut-out

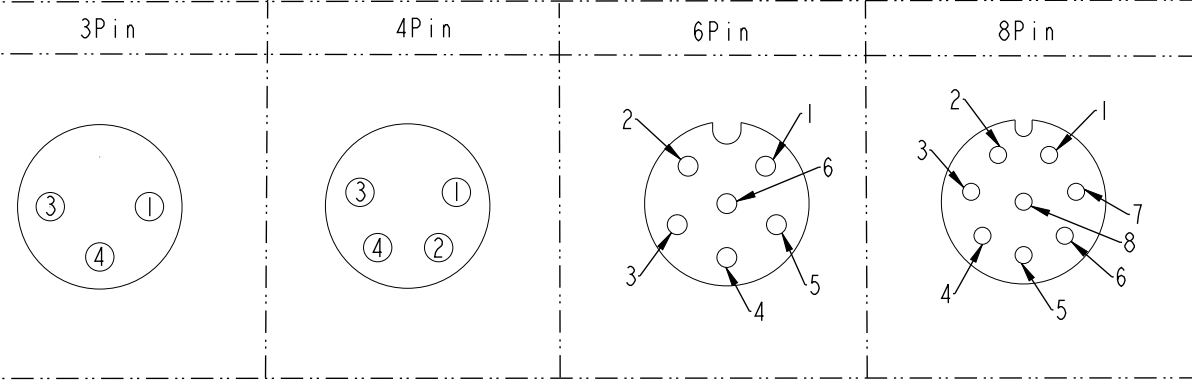

Pin Assignment Front View

		All dimension in mm	
		TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.1	REV. B SCALE Free
DRAWN BY Delu	APPROVED BY Roy	DATE(Y/M/D) 2024/08/27	PAGE OF 01 4
PART NO: M8AXX-P08F-LS0-00		TITLE: M8 A-CODE MALE SOLDER FRONT MOUNT	
CUSTOMER NO:			
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF TiMyn. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN.			