


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2023/03/30	Ann	New Item

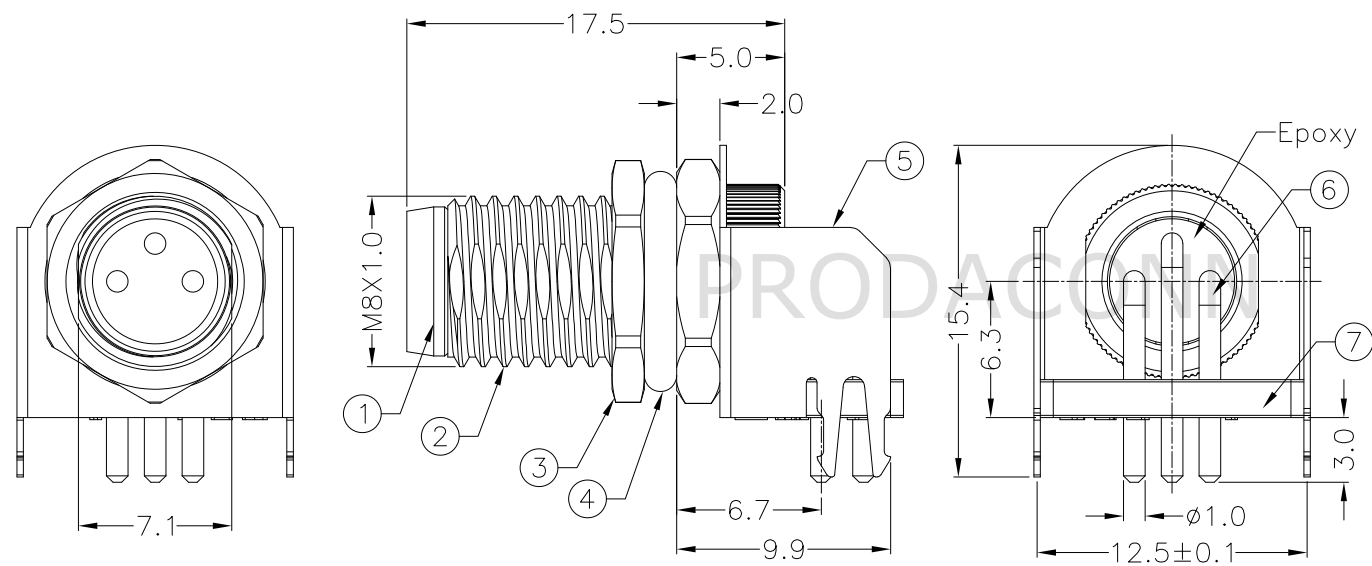


Note:


- ① \* Housing: Nylon,Black
- ② \* Shell1: Copper Alloy,Nickel Plated
- ③ \* Nut: Copper Alloy,Nickel Plated
- ④ \* O-Ring: Rubber,Black
- ⑤ \* Shell2: Copper Alloy,Nickel Plated
- ⑥ \* Male Pin: Copper Alloy,Gold Plated
- ⑦ \* Locking Plate: LCP

Recommendation:


- \* Waterproof Rate: IP67
- \* Rated Current: 3A
- \* Rated Voltage: 60V AC/DC
- \* Temperature Rating: -40°C~80°C



Pin Assignments  
Front View

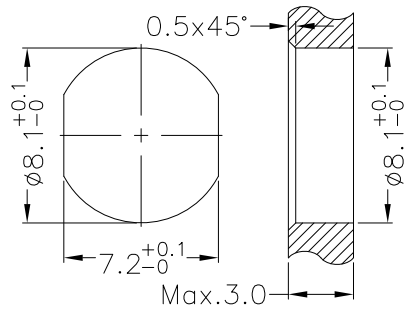

Recommend  
Panel Cut-Out

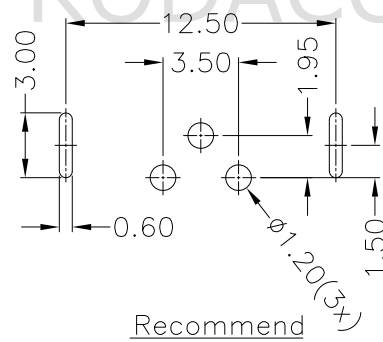

Recommend  
PCB Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED		REV. A	
.X	±0.25	SCALE 1:1	
.XX	±0.1		
.XXX	±0.05		
ANGLES	±1°		

DRAWN BY	APPROVED BY	DATE(Y/M/D)	PAGE	SIZE
Ann	Roy	2023/03/30	1/1	A4

PART NO:	TITLE		
M8A03-P08F-RDS-J0	M8 A-CODE MALE DIP TYPE		
CUSTOMER NO:			

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN.