


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2023/03/30	Ann	New Item

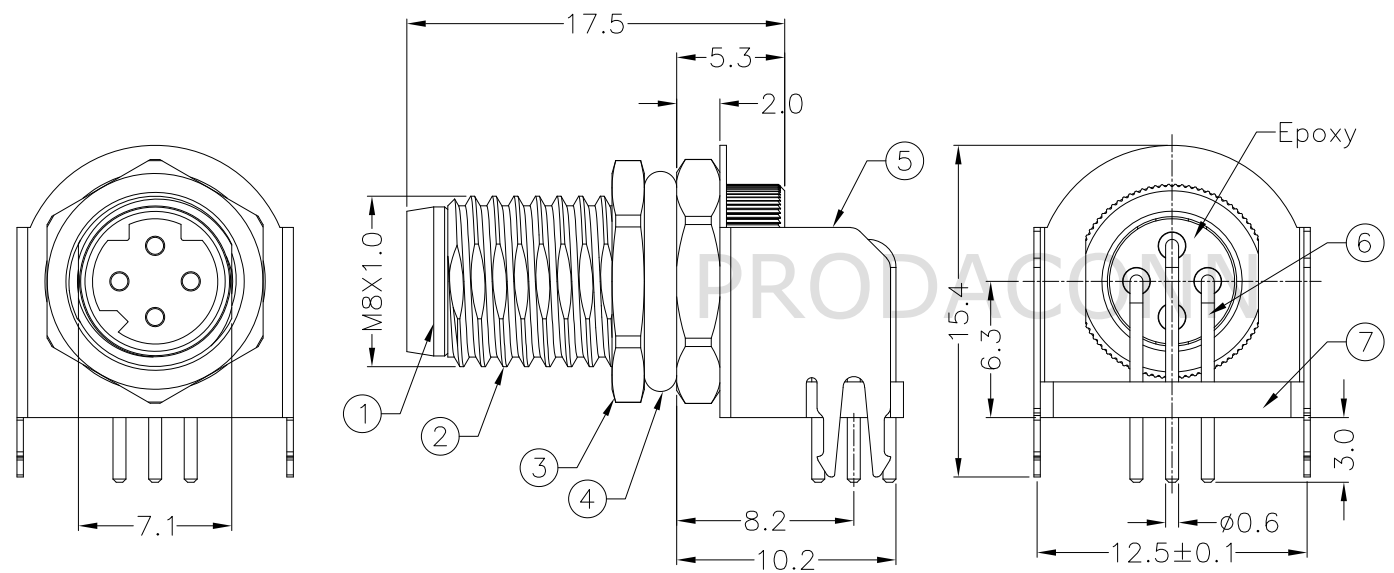


Note:


- ① * Housing: Nylon,Black
- ② * Shell1: Copper Alloy,Nickel Plated
- ③ * Nut: Copper Alloy,Nickel Plated
- ④ * O-Ring: Rubber,Black
- ⑤ * Shell2: Copper Alloy,Nickel Plated
- ⑥ * Male Pin: Copper Alloy,Gold Plated
- ⑦ * Locking Plate: LCP

Recommendation:


- * Waterproof Rate: IP67
- * Rated Current: 4A
- * Rated Voltage: 60V AC/DC
- * Temperature Rating: -40°C~80°C



Pin Assignments
Front View

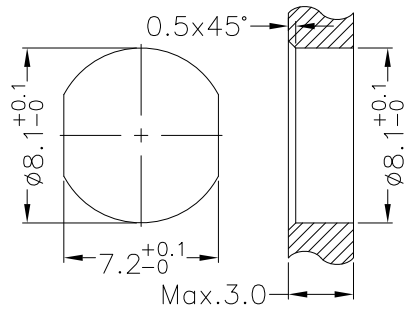

Recommend
Panel Cut-Out

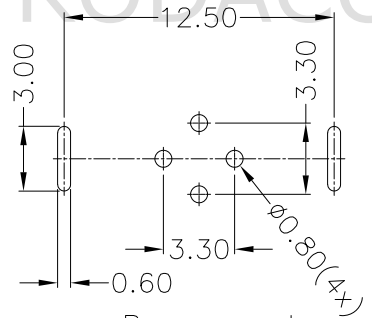

Recommend
PCB Layout

		All dimension in mm	
		TOLERANCE UNLESS OTHERWISE SPECIFIED	REV. A
		.X ±0.25	SCALE 1:1
		.XX ±0.1	
		.XXX ±0.05	
		ANGLES ±1°	
DRAWN BY	Ann	APPROVED BY	Roy
PART NO:	M8D04-P08F-RDS-J0	DATE(Y/M/D)	2023/03/30
CUSTOMER NO:		PAGE	1/1
		SIZE	A4
TITLE			
M8 D-CODE MALE DIP TYPE			
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN			