




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2023/03/31	Ann	New Item

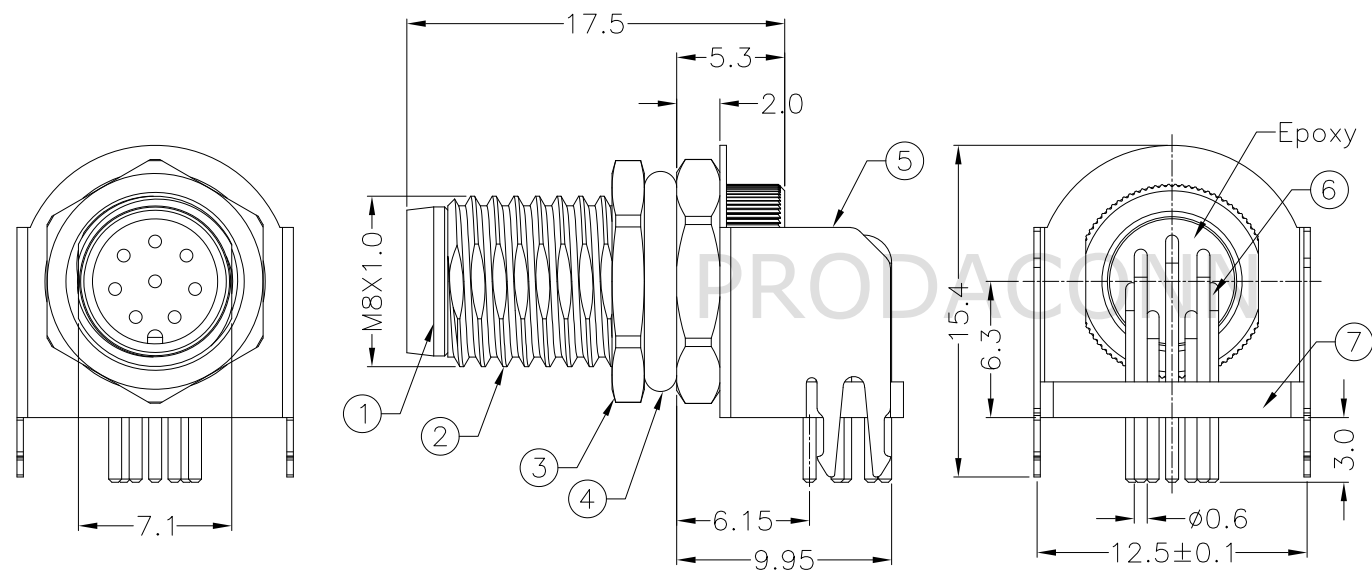


- Note:
- ① * Housing: Nylon,Black
 - ② * Shell1: Copper Alloy,Nickel Plated
 - ③ * Nut: Copper Alloy,Nickel Plated
 - ④ * O-Ring: Rubber,Black
 - ⑤ * Shell2: Copper Alloy,Nickel Plated
 - ⑥ * Male Pin: Copper Alloy,Gold Plated
 - ⑦ * Locking Plate: LCP
- Recommendation:
- * Waterproof Rate: IP67
 - * Rated Current: 1.5A
 - * Rated Voltage: 30V AC/DC
 - * Temperature Rating: -40°C~80°C



Pin Assignments
Front View

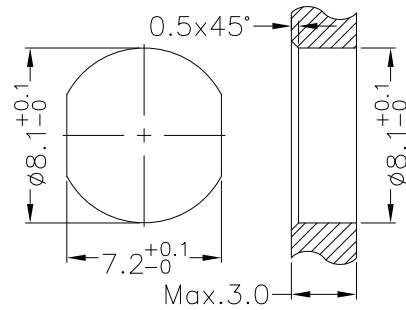

Recommend
Panel Cut-Out

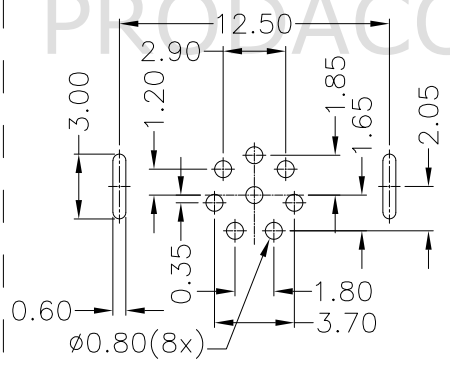

Recommend PCB Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED
REV.
A
SCALE
1:1

.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

DRAWN BY Ann	APPROVED BY Roy	DATE(Y/M/D) 2023/03/31	PAGE 1/1	SIZE A4
PART NO: M8A08-P08F-RDS-J0		TITLE M8 A-CODE MALE DIP TYPE		
CUSTOMER NO:				

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN