


5	6	7	8
REV. A	ECN NO. Initial Release	DATE 2025/04/25	SIGN Ann DESCRIPTION New Item



Part No.:  
M8AXX-SASN-LT0-K0  
03: 3Pin  
04: 4Pin

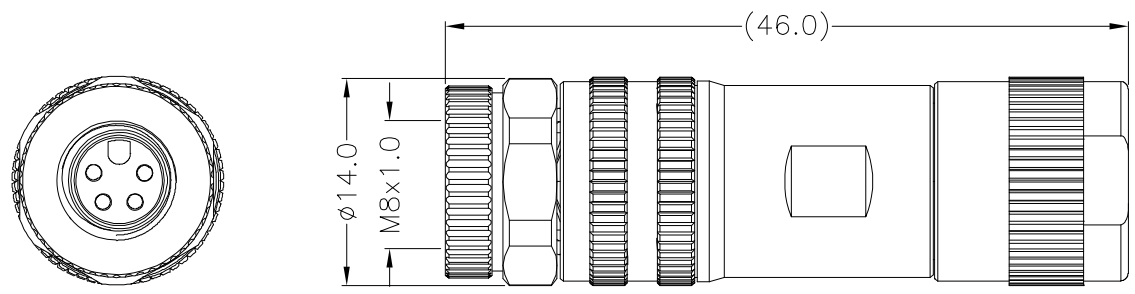


Note:

- \* Housing: Nylon,Black
- \* Male Pin: Copper Alloy,Gold Plated
- \* Nut: Copper Alloy,Nickel Plated
- \* O-Ring: NBR
- \* Shielding: Copper Alloy,Nickel Plated
- \* Operation Temperature: -25°C~+85°C
- \* Cable Diameter:  $\phi 3.5 \sim \phi 5.5 \text{mm}$
- \* Conductor Cross Section(AWG): Max.20AWG

Electrical Specification:

- \* IP Grade: IP67(In Mated Condition)
- \* Rated current: 4A
- \* Rated voltage: 60V

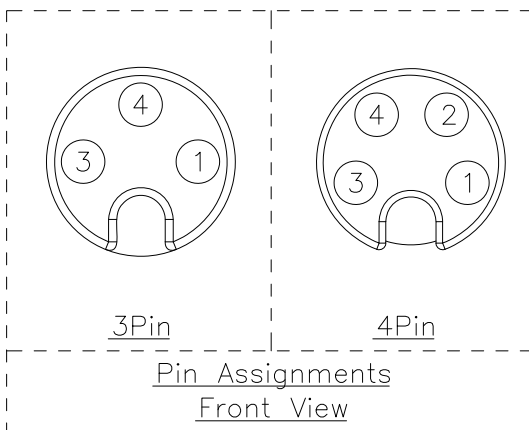

		All dimension in mm	
		TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.5	REV. A SCALE Free
DRAWN BY Ann	APPROVED BY Roy	DATE(Y/M/D) 2025/04/25	PAGE 1/1 SIZE A4
PART NO: M8AXX-SASN-LT0-K0		TITLE: M8 ASSEMBLY,SCREW-IN TYPE	
CUSTOMER NO:		THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN	