
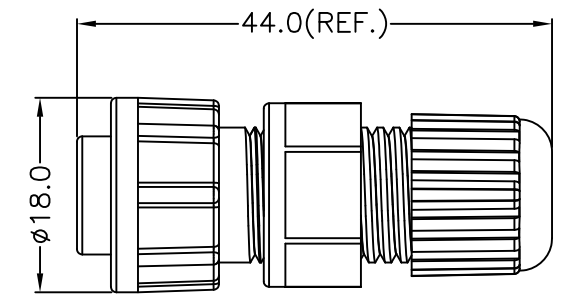


| REV. | ECN NO.         | DATE       | SIGN   | DESCRIPTION |
|------|-----------------|------------|--------|-------------|
| 01   | Initial Release | 2021/08/31 | YU-FEI | New Item    |
|      |                 |            |        |             |
|      |                 |            |        |             |

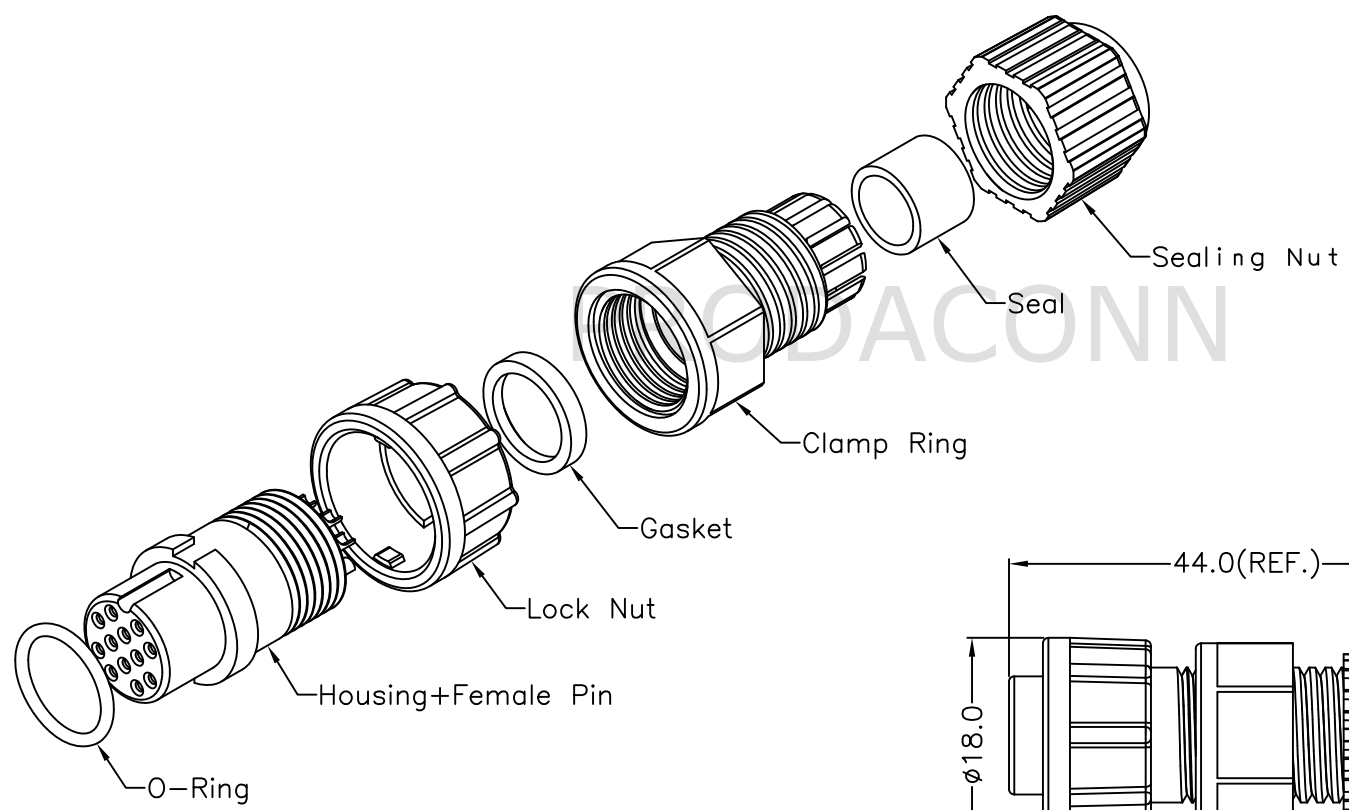


Recommend Cable OD=Ø4.5mm~Ø6.5mm


- Note:
- \* IP Grade: IP67
  - \* Rated current: 2A
  - \* Rated voltage: 250V

| 8   | Sealing Nut | Nylon,Black              | 1   |
|-----|-------------|--------------------------|-----|
| 7   | Seal        | Silicone                 | 1   |
| 6   | Clamp Ring  | Nylon,Black              | 1   |
| 5   | Gasket      | Silicone                 | 1   |
| 4   | Lock Nut    | Nylon,Black              | 1   |
| 3   | O-Ring      | Silicone                 | 1   |
| 2   | Female Pin  | Copper Alloy,Gold Plated | 12  |
| 1   | Housing     | Nylon,Black              | 1   |
| NO. | ITEM        | SPEC                     | QTY |

BOM LIST



Pin Assignments  
Front View



TOLERANCE UNLESS OTHERWISE SPECIFIED

±0.5

REV.

01

SCALE

1:1

|   |                   |             |     |                                  |            |      |     |      |    |
|---|-------------------|-------------|-----|----------------------------------|------------|------|-----|------|----|
| DRAWN BY  | YU-FEI            | APPROVED BY | Roy | DATE(Y/M/D)                      | 2021/08/31 | PAGE | 1/1 | SIZE | A4 |
| PART NO:  | CBU12-FFAP-LS0-F0 |             |     | TITLE                            |            |      |     |      |    |
| CUSTOMER NO:  |                   |             |     | CIRCULAR STANDARD(LOCK)<br>ASS'Y |            |      |     |      |    |
| THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN |                   |             |     |                                  |            |      |     |      |    |