



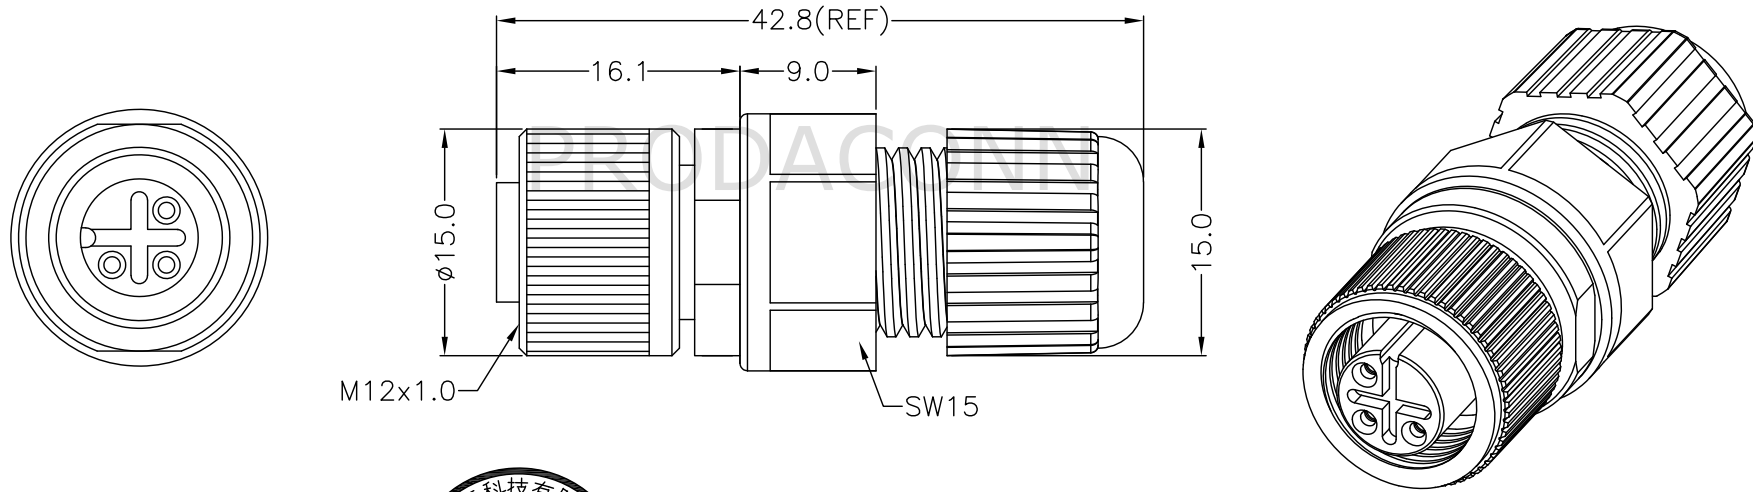

Note:
* IP Grade: IP67
* Rated current: 4A
* Rated voltage: 250V AC/DC
* Recommend Cable OD: 5.0~6.8mm

9	Sealing Nut	Nylon,Black	1
8	Seal	Silicone	1
7	Clamp Ring	Nylon,Black	1
6	Gasket	Silicone	1
5	Nut	Aluminum Alloy,Nickel Plated	1
4	Shell	Copper Alloy,Nickel Plated	1
3	O-Ring	EPDM	1
2	Pin	Copper Alloy,Gold Plated	3
1	Housing	PBT,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST



Pin Assignments
Front View

TOLERANCE UNLESS OTHERWISE SPECIFIED

±0.5

REV. 01

SCALE 1:1

DRAWN BY Ann

APPROVED BY Roy

PART NO: 12A03-SASH-LS0-F0

CUSTOMER NO:

DATE(Y/M/D) 2021/07/30

PAGE 1/1

SIZE A4

TITLE M12,A-CODE,ASS'Y

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF Timyn. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Prodaconn.