



成品料號說明







12XXX-P09F-LS0-AX

XX: Pin






1: Key點 45°方向

A:A Code

2: Key點 90°方向

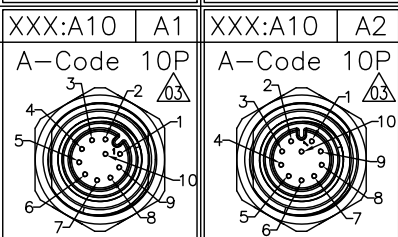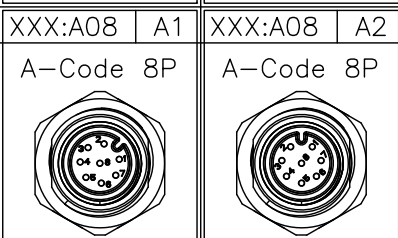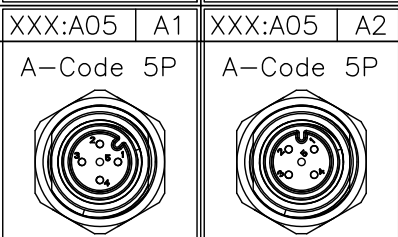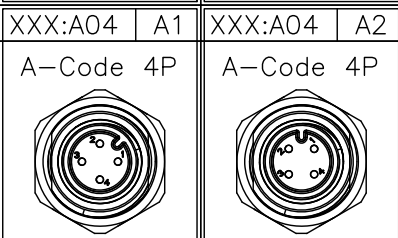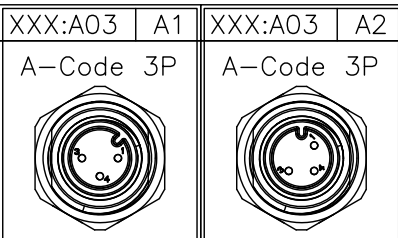

Pin Assignment

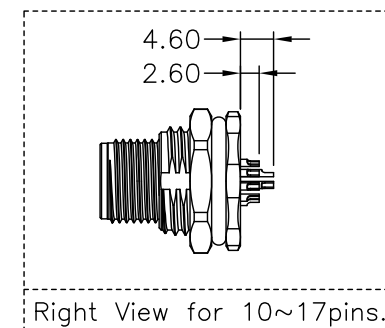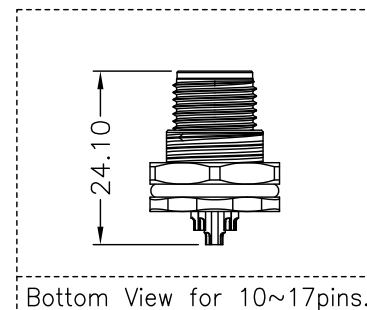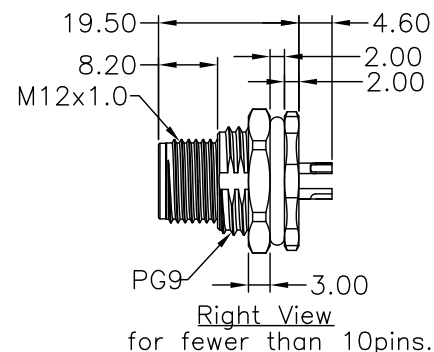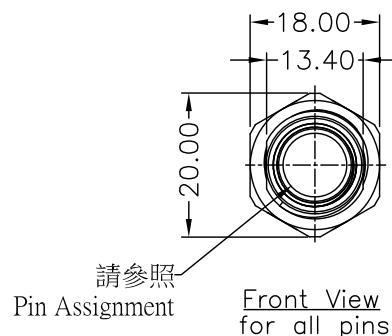

Material:

- ① Connector:
 - * Waterproof Rate:IP67
 - * Housing:Nylon+GF,Black.
 - * Male Pin:Copper Alloy,Gold Plated.
 - * Shield:Zinc Alloy,Nickel Plated.
- ② Screw Nut:Copper Alloy,Nickel Plated.
- ③ O-Ring:Silicone ,Black.

Recommendation:

- * For Panel Thickness Max 4.5mm.
- * Nut Torque:6-8 Kgf.cm.

*Wire range:		Current rating	Voltage rating
3~4pin	20~22#	4A	250V
5pin	20~22#	4A	60V
8pin	22~24#	2A	30V
10,12,17pin	24~26#	1.5A	30V

		All dimension in mm	
		TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	REV. 04 SCALE 1:1
DRAWN BY Doreen		APPROVED BY Roy	
DATE(Y/M/D) 2018/12/04		PAGE 1/1	SIZE A4
PART NO: 12XXX-P09F-LS0-AX		TITLE M12 MALE PANEL TYPE	
CUSTOMER NO:			
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF Tmyn. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Prodaconn.			