

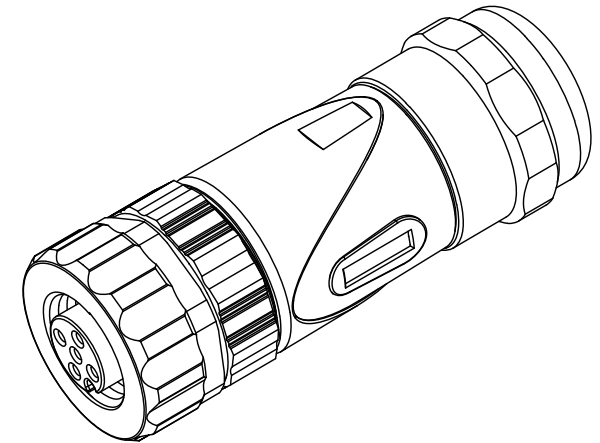
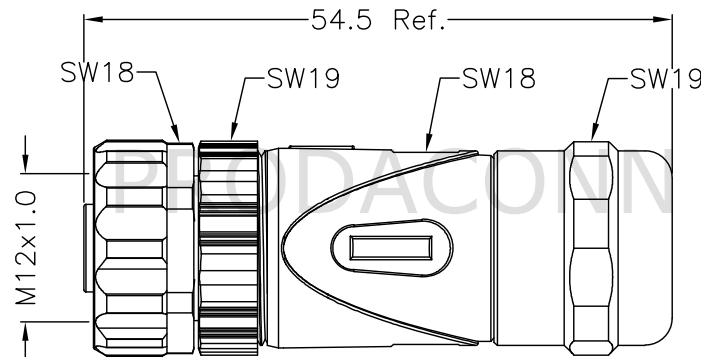


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/05/04	Ann	New Item



Pin Assignments
Front View

Note:

- * IP Grade: IP67
- * Rated current: 4A
- * Rated voltage: 60V
- * Operation Temperature: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- * Conductor Cross Section: 20AWG Max.
- * Cable OD Range: $\phi 4 \sim \phi 6\text{mm}(\text{BK}) / \phi 6 \sim \phi 8\text{mm}(\text{GY})$

7	Sealing Nut	Nylon,Black	1
6	Seal	NBR	1
5	Clamp Ring	Nylon,Black	1
4	Nut	Zinc Alloy,Nickel Plated	1
3	O-Ring	NBR	1
2	Pin	Copper Alloy,Gold Plated	5
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST



All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED

± 0.5

REV. 01

SCALE 1:1

DRAWN BY Ann	APPROVED BY Roy	DATE(Y/M/D) 2021/05/04	PAGE 1/1	SIZE A4
-----------------	--------------------	---------------------------	-------------	------------

PART NO: 12A05-SASH-LT0-K0	TITLE M12 A-CODE ASSEMBLY
CUSTOMER NO:	

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN.