
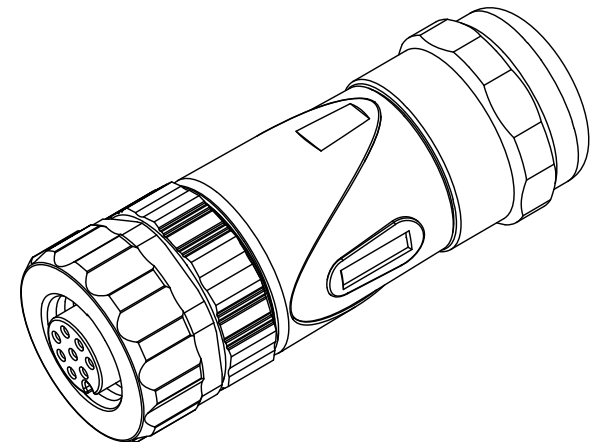
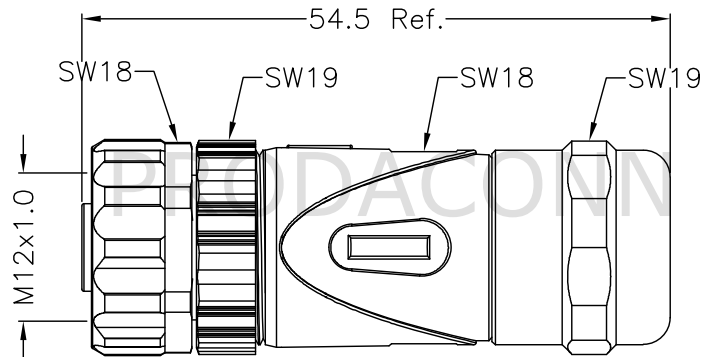



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/05/05	Ann	New Item




7	Sealing Nut	Nylon,Black	1
6	Seal	NBR	1
5	Clamp Ring	Nylon,Black	1
4	Nut	Zinc Alloy,Nickel Plated	1
3	O-Ring	NBR	1
2	Pin	Copper Alloy,Gold Plated	8
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

PRODACONN

BOM LIST					
 PRODACONN			 All dimension in mm	REV. 01	
				SCALE 1:1	
TOLERANCE UNLESS OTHERWISE SPECIFIED			±0.5		
DRAWN BY Ann		APPROVED BY Roy		DATE(Y/M/D) 2021/05/05	
				PAGE 1/1	SIZE A4
PART NO: 12A08-SASH-LT0-K0			TITLE M12 A-CODE ASSEMBLY		
CUSTOMER NO:					
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN					

- Note:
- * IP Grade: IP67
 - * Rated current: 2A
 - * Rated voltage: 30V
 - * Operation Temperature: -25°C~85°C
 - * Conductor Cross Section: 20AWG Max.
 - * Cable OD Range: Ø4~Ø6mm(BK)/Ø6~Ø8mm(GY)

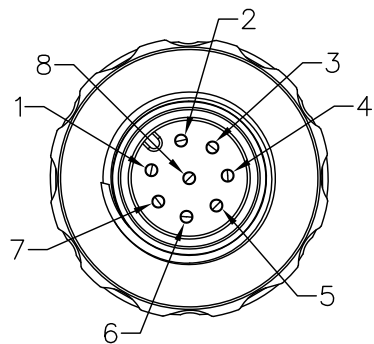

Pin Assignments
Front View