

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/05/05	Ann	New Item

F

F

E

E

D

D

C




C

B


B

A

A

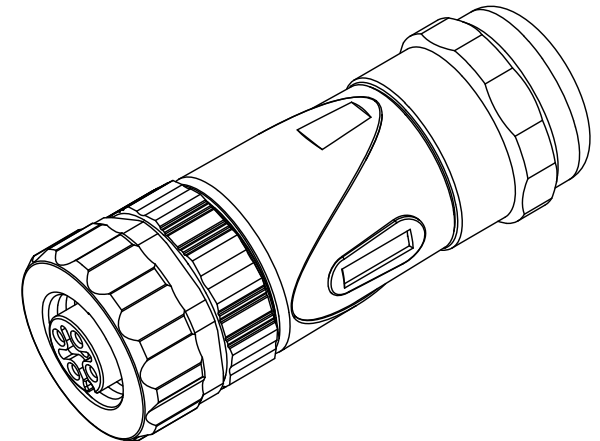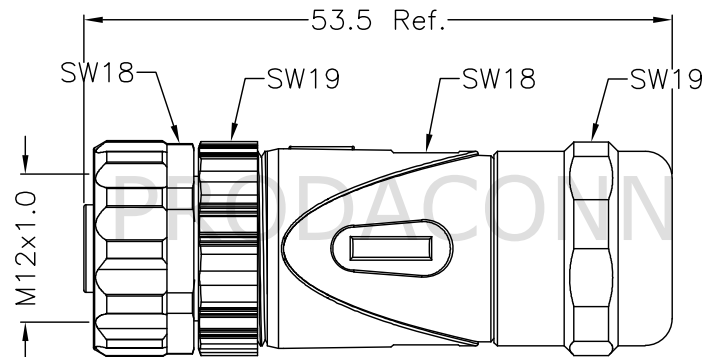

PRODACONN

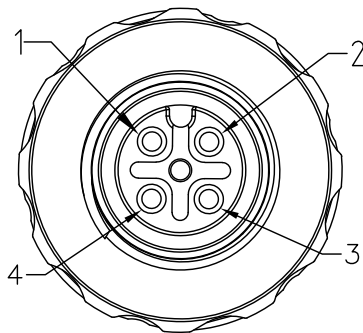


Pin Assignments
Front View

Note:

- * IP Grade: IP67
- * Rated current: 4A
- * Rated voltage: 250V
- * Operation Temperature: -25°C~85°C
- * Conductor Cross Section: 18AWG Max.
- * Cable OD Range: $\phi 4 \sim \phi 6 \text{mm(BK)}$ / $\phi 6 \sim \phi 8 \text{mm(GY)}$

7	Sealing Nut	Zinc Alloy,Nickel Plated	1
6	Clamp Ring	Zinc Alloy,Nickel Plated	1
5	Seal	FPM/FKM	1
4	Screw Nut	Zinc Alloy,Nickel Plated	1
3	O-Ring	NBR	1
2	Female Pin	Copper Alloy,Gold Plated	4
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST

 PRODACONN			 All dimension in mm				
			TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.5				
DRAWN BY Ann		APPROVED BY Roy		DATE(Y/M/D) 2021/05/05		REV. 01	
						SCALE 1:1	
PART NO: 12A04—SASN—LTO—KO		TITLE M12 A—CODE ASSEMBLY					
CUSTOMER NO:							
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN							

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN