

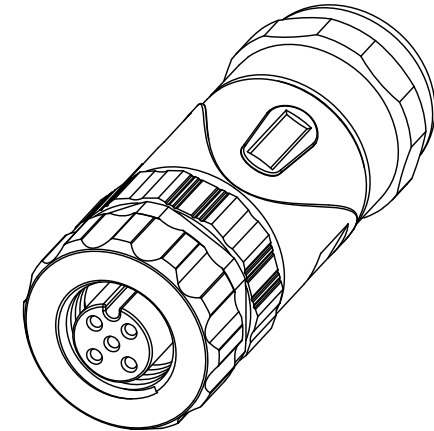
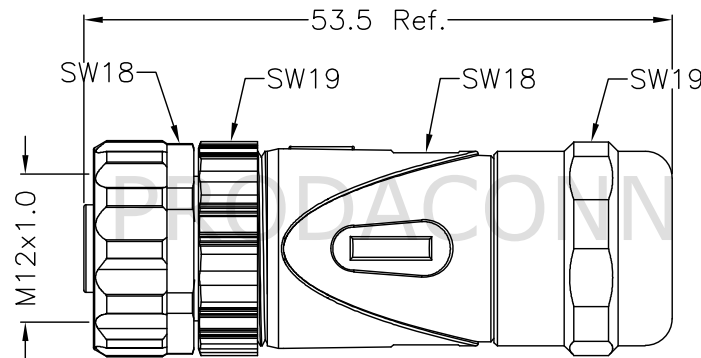


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/09/07	Ann	New Item





7	Sealing Nut	Zinc Alloy,Nickel Plated	1
6	Clamp Ring	Zinc Alloy,Nickel Plated	1
5	Seal	FPM/FKM	1
4	Screw Nut	Zinc Alloy,Nickel Plated	1
3	O-Ring	NBR	1
2	Female Pin	Copper Alloy,Gold Plated	5
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

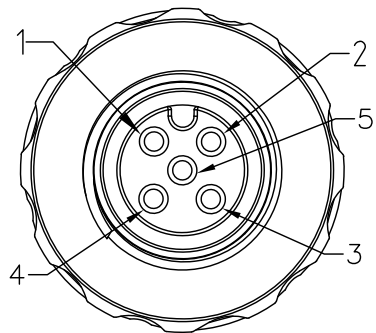

Pin Assignments
Front View

Note:

- * IP Grade: IP67
- * Rated current: 4A
- * Rated voltage: 60V
- * Operation Temperature: -25°C~85°C
- * Conductor Cross Section: 20AWG Max.
- * Cable OD Range: $\phi 4 \sim \phi 6 \text{mm(BK)}$ / $\phi 6 \sim \phi 8 \text{mm(GY)}$

BOM LIST				
 PRODACONN			 All dimension in mm	
			TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.5	
DRAWN BY Ann		APPROVED BY Roy		REV. 01 SCALE 1:1
PART NO: 12A05-SASN-LT0-K0		DATE(Y/M/D) 2021/09/07		PAGE 1/1 SIZE A4
CUSTOMER NO:		TITLE M12 A-CODE ASSEMBLY		
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN				