


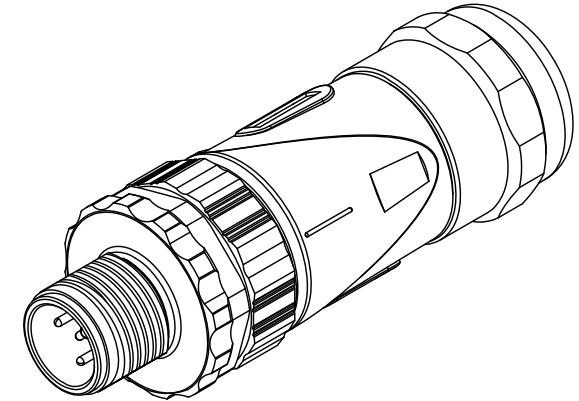


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/09/09	Ann	New Item

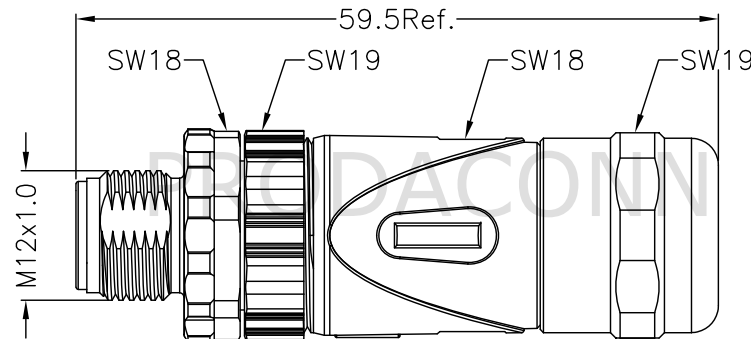

Pin Assignments
Front View



Note:

- * IP Grade: IP67
- * Rated current: 4A
- * Rated voltage: 250V
- * Operation Temperature: -25°C~85°C
- * Conductor Cross Section: 18AWG Max.
- * Cable OD Range: $\phi 4 \sim \phi 6 \text{mm (BK)}$ / $\phi 6 \sim \phi 8 \text{mm (GY)}$

6	Sealing Nut	Zinc Alloy,Nickel Plated	1
5	Clamp Ring	Zinc Alloy,Nickel Plated	1
4	Seal	NBR,Black	1
3	Nut	Zinc Alloy,Nickel Plated	1
2	Pin	Copper Alloy,Gold Plated	4
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST





All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED	REV. 01
±0.5	SCALE 1:1

DRAWN BY	APPROVED BY	DATE(Y/M/D)	PAGE	SIZE
Ann	Roy	2021/09/09	1/1	A4
PART NO:	TITLE M12 A-CODE ASSEMBLY,METAL			
12A04-PASN-LT0-K0				
CUSTOMER NO:				
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN				