

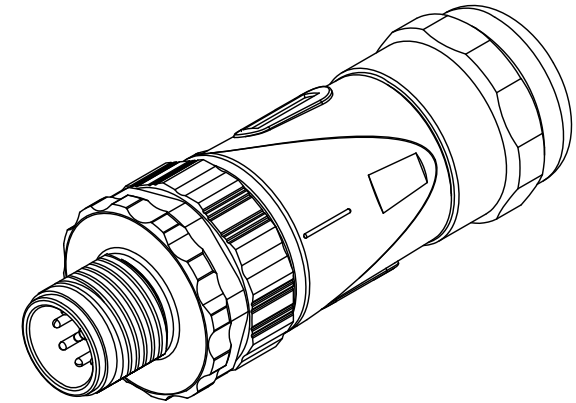
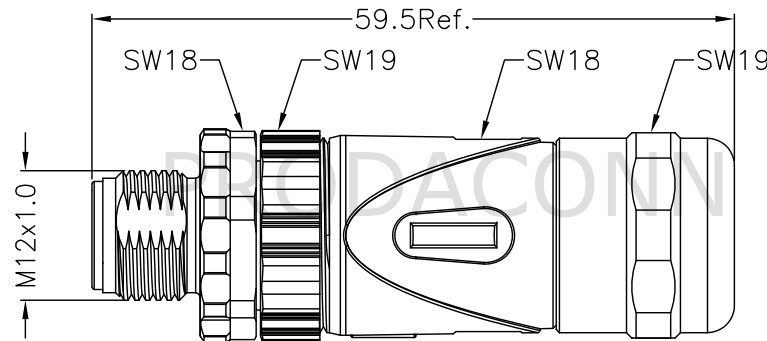


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/09/09	Ann	New Item



Pin Assignments  
Front View

Note:

- \* IP Grade: IP67
- \* Rated current: 4A
- \* Rated voltage: 60V
- \* Operation Temperature:  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- \* Conductor Cross Section: 20AWG Max.
- \* Cable OD Range:  $\phi 4 \sim \phi 6\text{mm}(\text{BK}) / \phi 6 \sim \phi 8\text{mm}(\text{GY})$

6	Sealing Nut	Zinc Alloy,Nickel Plated	1
5	Clamp Ring	Zinc Alloy,Nickel Plated	1
4	Seal	NBR,Black	1
3	Nut	Zinc Alloy,Nickel Plated	1
2	Pin	Copper Alloy,Gold Plated	5
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

# BOM LIST



All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED	REV. 01
$\pm 0.5$	SCALE 1:1

DRAWN BY Ann	APPROVED BY Roy	DATE(Y/M/D) 2021/09/09	PAGE 1/1	SIZE A4
--------------	-----------------	------------------------	----------	---------

PART NO: 12A05-PASN-LT0-K0	TITLE M12 A-CODE ASSEMBLY,METAL
CUSTOMER NO:	

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN.