
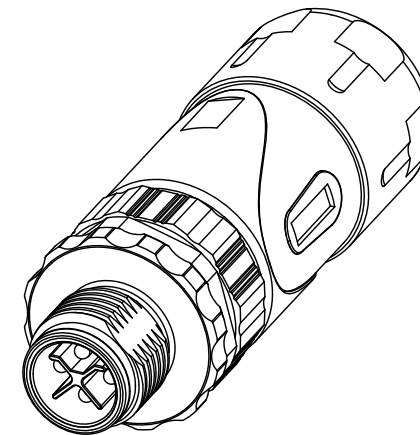
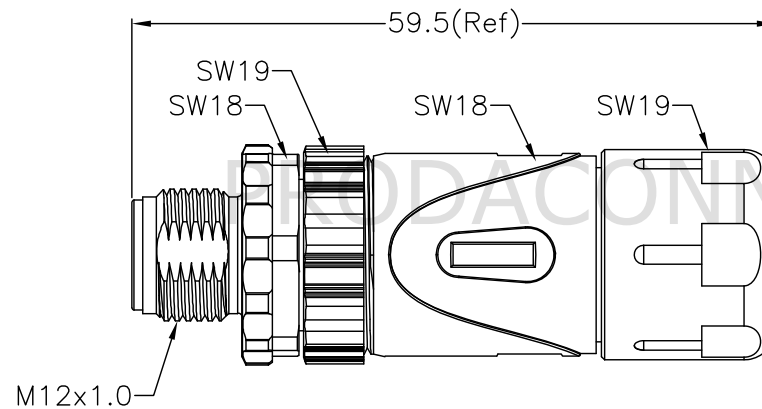


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/09/08	Ann	New Item



PRODACONN

6	Sealing Nut	Nylon,Black	1
5	Clamp Ring	Nylon,Black	1
4	Seal	FPM/FKM	1
3	Nut	Zinc Alloy,Nickel Plated	1
2	Pin	Copper Alloy,Gold Plated	4
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST




All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED	REV. 01
±0.5	SCALE 1:1

DRAWN BY Ann	APPROVED BY Roy	DATE(Y/M/D) 2021/09/08	PAGE 1/1	SIZE A4
PART NO: 12S04-PASH-LT0-K0		TITLE M12 S-CODE ASSEMBLY		
CUSTOMER NO:				
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN				

Note:

- * IP Grade: IP67,in mated condition
- * Rated current: 12A
- * Rated voltage: 630V AC
- * Operation Temperature: -25°C~85°C
- * Conductor Cross Section: 16AWG Max.
- * Cable OD Range: 8~10mm



Pin Assignments
Front View