

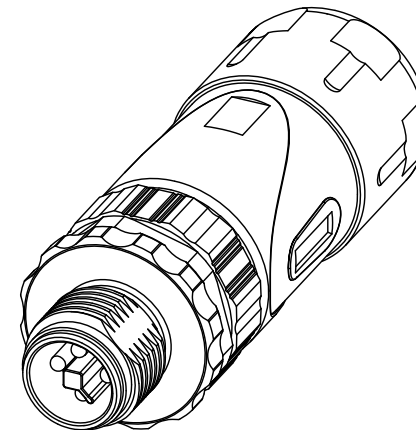


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/09/09	Ann	New Item

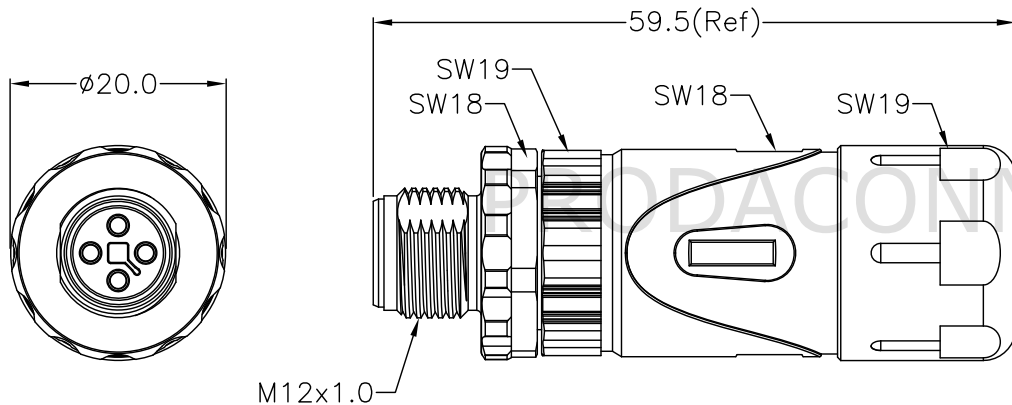

Pin Assignments  
Front View

Note:

- \* IP Grade: IP67,in mated condition
- \* Rated current: 12A
- \* Rated voltage: 63V DC
- \* Operation Temperature:  $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$
- \* Conductor Cross Section: 16AWG Max.
- \* Cable OD Range:  $\phi 8\sim \phi 10\text{mm}$

6	Sealing Nut	Nylon,Black	1
5	Clamp Ring	Nylon,Black	1
4	Seal	FPM/FKM,Black	1
3	Nut	Zinc Alloy,Nickel Plated	1
2	Pin	Copper Alloy,Gold Plated	4
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

# BOM LIST



All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED	REV. 01
$\pm 0.5$	SCALE 1:1

DRAWN BY	APPROVED BY	DATE(Y/M/D)	PAGE	SIZE
Ann	Roy	2021/09/09	1/1	A4
PART NO:	TITLE  M12 T-CODE ASSEMBLY			
12T04-PASH-LT0-K0				
CUSTOMER NO:				
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN				