




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/05/05	Ann	New Item
02		2021/10/21	Ann	Modify the appearance

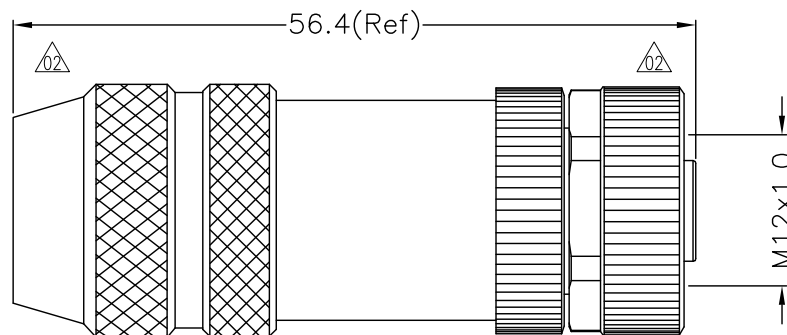


Pin Assignments
Front View

Note:

- * IP Grade: IP67
- * Rated current: 12A
- * Rated voltage: 630V AC
- * Operation Temperature: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- * Applicable Cable OD: 8~10mm
- * Conductor Cross Section: 16AWG Max.
- * Connection Method: Screw Type

7	Sealing Nut	Zinc Alloy,Nickel Plated	1
6	Clamp Ring	Zinc Alloy,Nickel Plated	1
5	Seal	FPM/FKM	1
4	Screw Nut	Zinc Alloy,Nickel Plated	1
3	O-Ring	NBR	1
2	Female Pin	Copper Alloy,Gold Plated	4
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST



All dimension in mm

TOLERANCE UNLESS
OTHERWISE SPECIFIED

± 0.5

REV.

02

SCALE

1:1

DRAWN BY

Ann

APPROVED BY

Roy

DATE(Y/M/D)

2021/05/05

PAGE

1/1

SIZE

A4

PART NO:

12S04-SASN-LT0-K0

TITLE

M12 S-CODE ASSEMBLY

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN.