

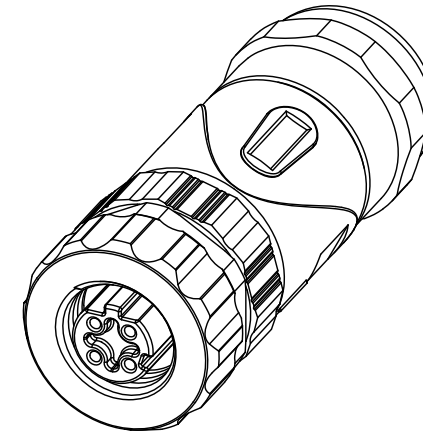


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/09/10	Ann	New Item

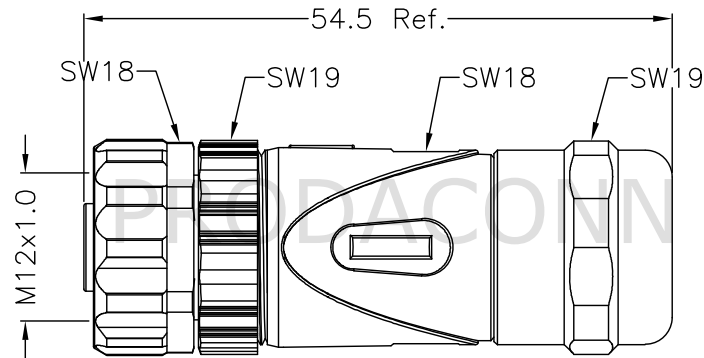

7	Sealing Nut	Zinc Alloy,Nickel Plated	1
6	Clamp Ring	Zinc Alloy,Nickel Plated	1
5	Seal	FPM/FKM	1
4	Screw Nut	Zinc Alloy,Nickel Plated	1
3	O-Ring	NBR	1
2	Female Pin	Copper Alloy,Gold Plated	4
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST




<div> <div> </div> <div> All dimension in mm </div> </div>	
TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.5	REV. 01
	SCALE 1:1

DRAWN BY Ann	APPROVED BY Roy	DATE(Y/M/D) 2021/09/10	PAGE 1/1	SIZE A4
PART NO: 12D04-SASN-LT0-K0		TITLE M12 D-CODE ASSEMBLY		
CUSTOMER NO:				

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN

- Note:
- * IP Grade: IP67
 - * Rated current: 4A
 - * Rated voltage: 250V
 - * Operation Temperature: -25°C~85°C
 - * Conductor Cross Section: 18AWG Max.
 - * Cable OD Range: $\phi 4\sim\phi 6\text{mm(BK)}/\phi 6\sim\phi 8\text{mm(GY)}$



Pin Assignments
Front View