

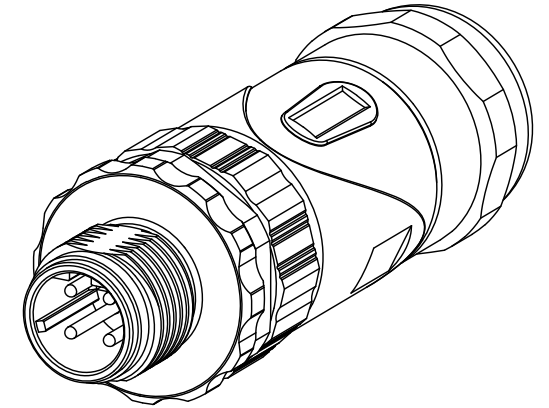
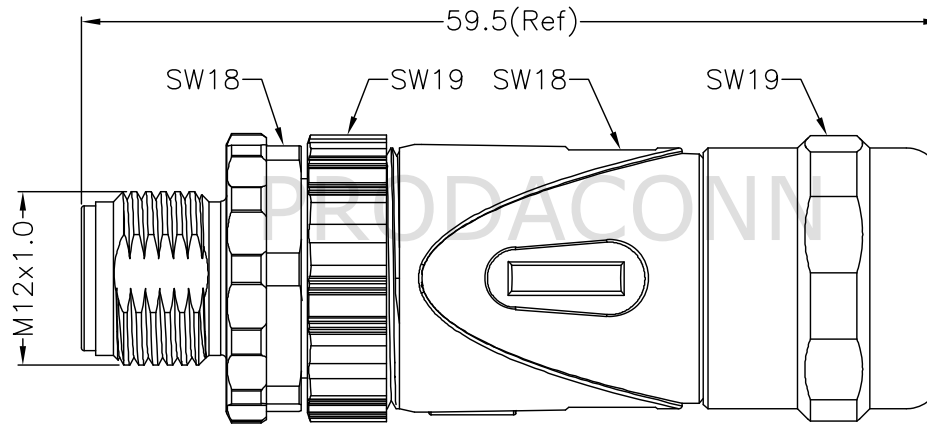


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/04/16	Ann	New Item

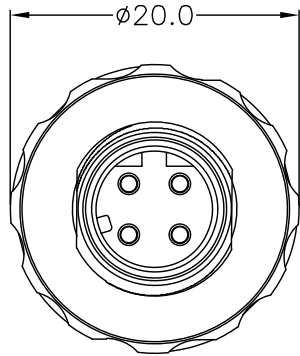

Pin Assignments

Front View

Note:

- * IP Grade: IP67(In Mated Condition)
- * Rated current: 4A
- * Rated voltage: 250V
- * Operation Temperature: -25°C~85°C
- * Conductor Cross Section: 18AWG Max.
- * Cable OD Range: $\phi 4 \sim \phi 6$ mm(BK)/ $\phi 6 \sim \phi 8$ mm(GY)

6	Sealing Nut	Zinc Alloy,Nickel Plated	1
5	Clamp Ring	Zinc Alloy,Nickel Plated	1
4	Seal	NBR	1
3	Nut	Zinc Alloy,Nickel Plated	1
2	Pin	Copper Alloy,Gold Plated	4
1	Housing	Nylon,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST						
 PRODACONN			  All dimension in mm			
			TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.5		REV. 01	
					SCALE 1:1	
DRAWN BY Ann		APPROVED BY Roy		DATE(Y/M/D) 2021/04/16	PAGE 1/1	SIZE A4
PART NO: 12D04-PASN-LT0-K0				TITLE M12 D-CODE ASSEMBLY		
CUSTOMER NO:						
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN						

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN