




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		2024/11/01	Delu	Modify Overview
C		2024/12/12	Delu	Modify PART NO.
D		2025/02/26	Delu	Modify Note



Conn.1
IP Grade: IP67

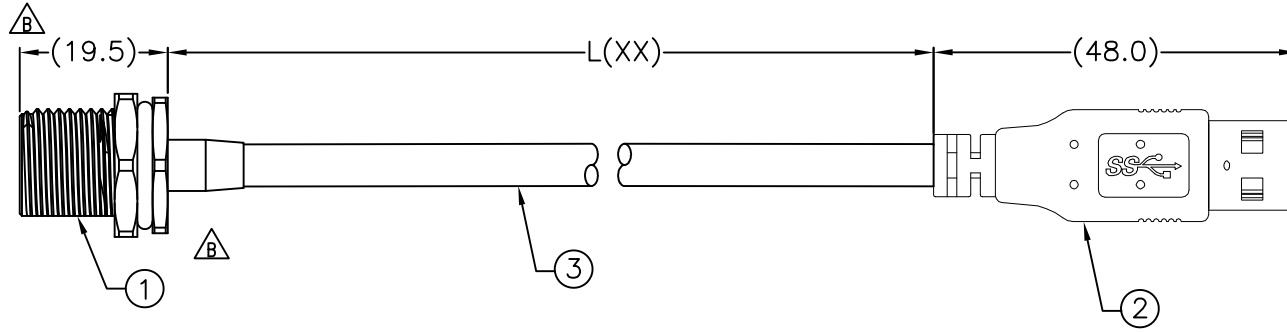

Conn.2




Part No.:
UCM09-P09F-SCH-UX

- Cable Length
- 1: 100mm±10mm
 - 2: 200mm±15mm
 - 3: 300mm±15mm
 - 4: 400mm±20mm
 - 5: 500mm±20mm

- △ Note:
- ①* Conn.1: Type C Female PG9
Housing: Nylon+GF,Black
O-Ring: Silicone,Black
Shielding: Zinc Alloy,Nickel Plated
Nut: Copper Alloy,Nickel Plated
 - ②* Conn.2: USB 3.0 Plug
 - ③* Cable: 28/28/24+AEB
PVC Jacket,OD=5.6mm,Black

Shell	Drain	地線	Shell	
A2	Orange(TX+)	橘	9	Twist
A3	Purple(TX-)	紫	8	
GND	GND	地線	7	
B11	Yellow(RX+)	黃	6	Twist
B10	Blue(RX-)	藍	5	
A1/A12/B1/B12	Black(GND)	黑	4	
B5	VCONN			
A5	Rd:56KΩ(CC)	電阻		
A6/B6	Green(D+)	綠	3	Twist
A7/B7	White(D-)	白	2	
A4/A9/B4/B9	Red(VBUS)	紅	1	
Conn.1	Wire Color		Conn.2	
Pin Out				

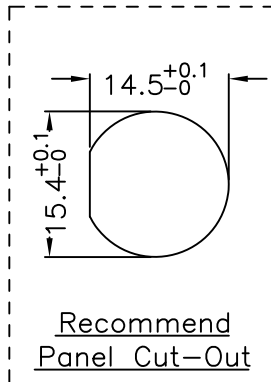

△ All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED

±0.5

DRAWN BY Delu	APPROVED BY Roy	DATE(Y/M/D) 2024/10/09	REV. D
PART NO.: △ UCM09-S09F-SCH-UX		SCALE 1:1	
CUSTOMER NO.:		PAGE 1/1	SIZE A4
TITLE TYPE C TO USB3.0 WITH CABLE			

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN