


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2025/02/05	Delu	New Item

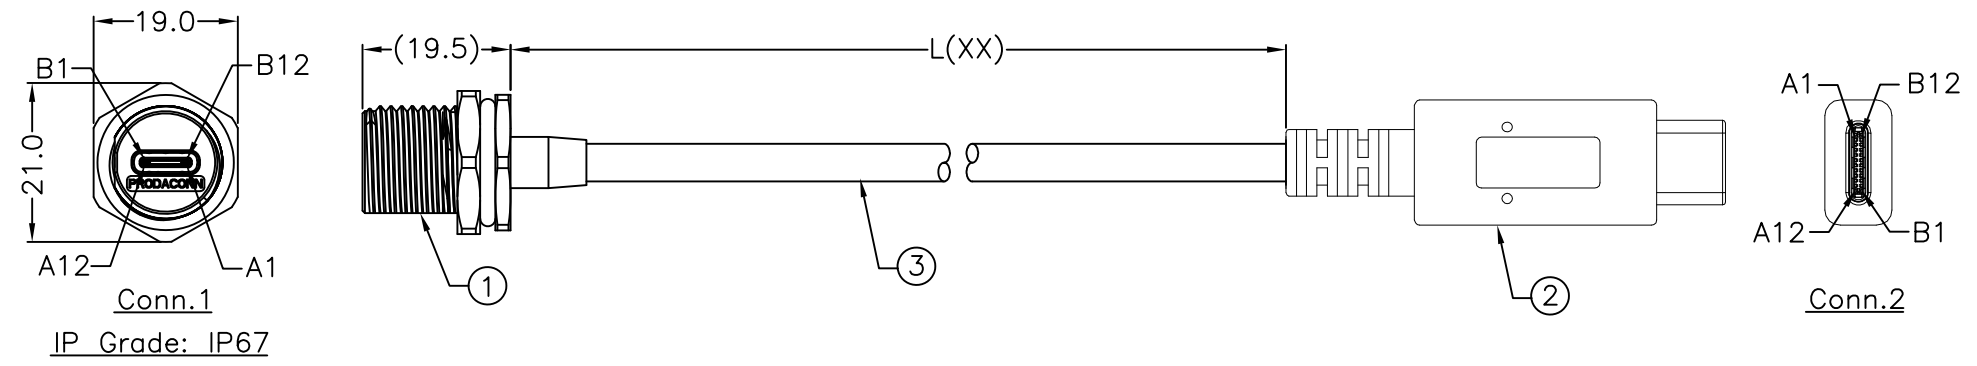


Part No.:
UCM24-P09F-SCH-CX

- Cable Length
- 1: 100mm±10mm
 - 2: 200mm±15mm
 - 3: 300mm±15mm
 - 4: 400mm±20mm
 - 5: 500mm±20mm

- Note:
- ①* Conn.1: Type C Female PG9
O-Ring: Silicone,Black.
Shielding: Zinc Alloy,Nickel Plated
Nut: Copper Alloy,Nickel Plated
 - ②* Conn.2: Type C Male
 - ③* Cable:28/28/24+AEB
PVC Jacket,OD=5.0mm,Black



Shell	Drain	Shield	Shell
B5	Red 紅	VCONN	B5
A6	Green 綠	D+	A6
A7	White 白	D-	A7
A12	Drain	GND	A12
A10	Blue 綠藍	RX2-	A10
A11	White 綠白	RX2+	A11
B1/A12	Drain	GND	B1/A12
B3	Blue 橙藍	TX2-	B3
B2	White 橙白	TX2+	B2
B8	Blue 藍	SBU2	B8
A8	Black 黑	SBU1	A8
A5	Yellow 黃	CC	A5
B10	Blue 紅藍	RX1-	B10
B11	White 紅白	RX1+	B11
A1/B12	Drain	GND	A1/B12
A3	Blue 藍藍	TX1-	A3
A2	White 藍白	TX1+	A2
A4/A9	Gray 灰	VBUS	A4/A9
B4/B9	Green 綠		B4/B9
	Brown 棕		
Conn.1	Wire Color		Conn.2
	Pin Out		

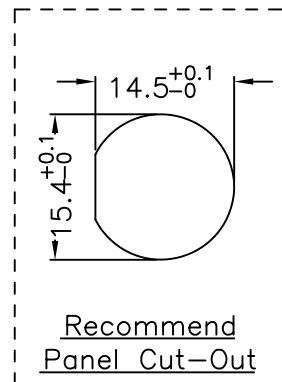

All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED

±0.5

REV.	A
SCALE	1:1

DRAWN BY	APPROVED BY	DATE(Y/M/D)	PAGE	SIZE
Delu	Roy	2025/02/05	1/1	A4

PART NO:	TITLE
UCM24-S09F-SCH-CX	TYPE C TO TYPE C WITH CABLE
CUSTOMER NO:	

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN