


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		2025/02/26	Delu	Modify Length
C		2025/05/26	Delu	Modify Note.
D		2025/06/02	Delu	Modify Part. No.

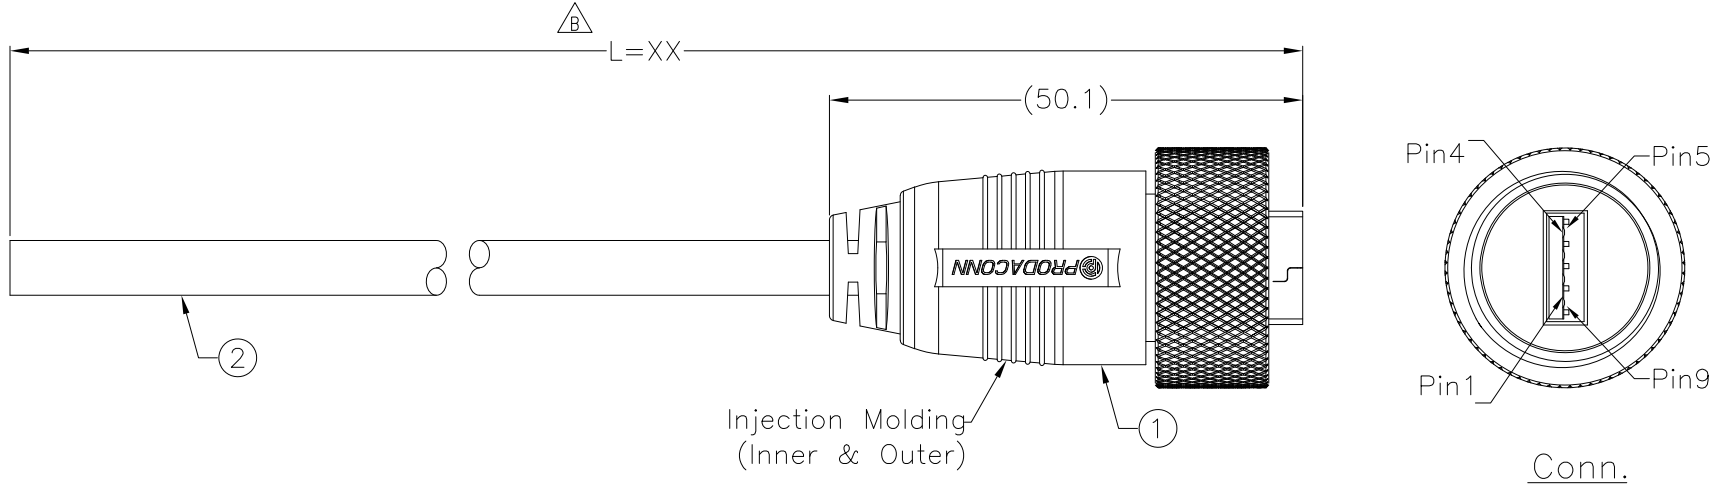

Part No.:
U3M09-PPNL-MXX

Cable Length
01: 01Meter
02: 02Meters
:
99: 99Meters(Max.)

* Cable Length Tolerance:
1M~5M: ±50mm
5.01M~10M: ±80mm
10.01M~20M: ±100mm
20.01M~30M: ±150mm
30.01M~40M: ±200mm
40.01M~50M: ±250mm



Note:

- * IP Grade: IP67
- ① * Conn.1: Waterproof USB3.0 Type A Plug
Scerw Nut: Brass,Nickel Plated
Gasket: Silicone,Black
- ② * Cable: tai ming/prodaconn USB 3.0 CABLE
(28AWGx2C+D+A+HY)x2P+(28AWGx2C+A+HM)x1P
+24AWGx2C+ADB,PVC Jacket,OD5.8,Black

Shell	Braid	編織
9	Orange 28AWG	橘
8	Purple 28AWG	紫
7	Drain(紫+橘) Drain(黃+藍)	地線
6	Yellow 28AWG	黃
5	Blue 28AWG	藍
4	Black 24AWG	黑
3	Green 28AWG	綠
2	White 28AWG	白
1	Red 24AWG	紅
Conn.1	Wire Color	
	Pin Out	

Twist

Twist

Twist

		All dimension in mm	
		TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.5	REV. D SCALE Free
DRAWN BY Delu	APPROVED BY Roy	DATE(Y/M/D) 2025/02/05	PAGE 1/1 SIZE A4
PART NO.: U3M09-PPSL-MXX		TITLE: WATERPROOF USB3.0 TYPE A	
CUSTOMER NO.:			
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN			