


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
01	Initial Release	2021/09/30	Ann	New Item

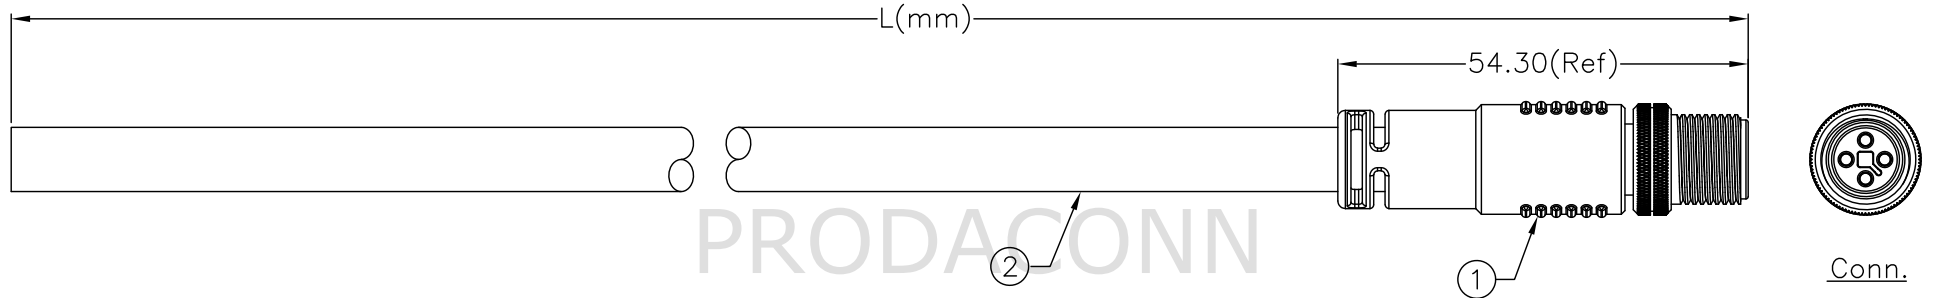

Part No.:
12T04-PPNL-MXX

- Cable Length
- 01: 01Meter
- 02: 02Meters
- ⋮
- 99: 99Meters(Max.)

- * Cable Length Tolerance:
- 1M~5M: ±50mm
- 5.01M~10M: ±80mm
- 10.01M~20M: ±100mm
- 20.01M~30M: ±150mm
- 30.01M~40M: ±200mm
- 40.01M~50M: ±250mm

- Note:
- * IP Grade: IP67
 - * Rated current: 12A
 - * Rated voltage: 63V

2	P229SJTW184C001	SJTW 18AWGx4C PVC Jacket,OD8.5mm,Black	N
1	PH07ZSE-M12MMT4L81	Nut: Copper Alloy,Nickel Plated	1
		Male Pin: Copper Alloy,Gold Plated	4
		Housing: PA66,Black	1
NO.	ITEM	SPEC	QTY

BOM LIST

⊕ All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED


±0.5

REV.	01
SCALE	1:1

DRAWN BY Ann	APPROVED BY Roy	DATE(Y/M/D) 2021/09/30	PAGE 1/1	SIZE A4
-----------------	--------------------	---------------------------	-------------	------------

PART NO. 12T04-PPNL-MXX	TITLE M12 T-CODE MOLDING
CUSTOMER NO:	

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN



Pin Assignments
Front View

4	Green	綠
3	Red	紅
2	White	白
1	Black	黑
Conn.	Wire Color	
Pin Out		

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN