


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D		2024/07/02	Delu	Modify Overview
E		2024/10/09	Delu	Modify Overview
F		2024/10/21	Delu	Modify Cable Specifications

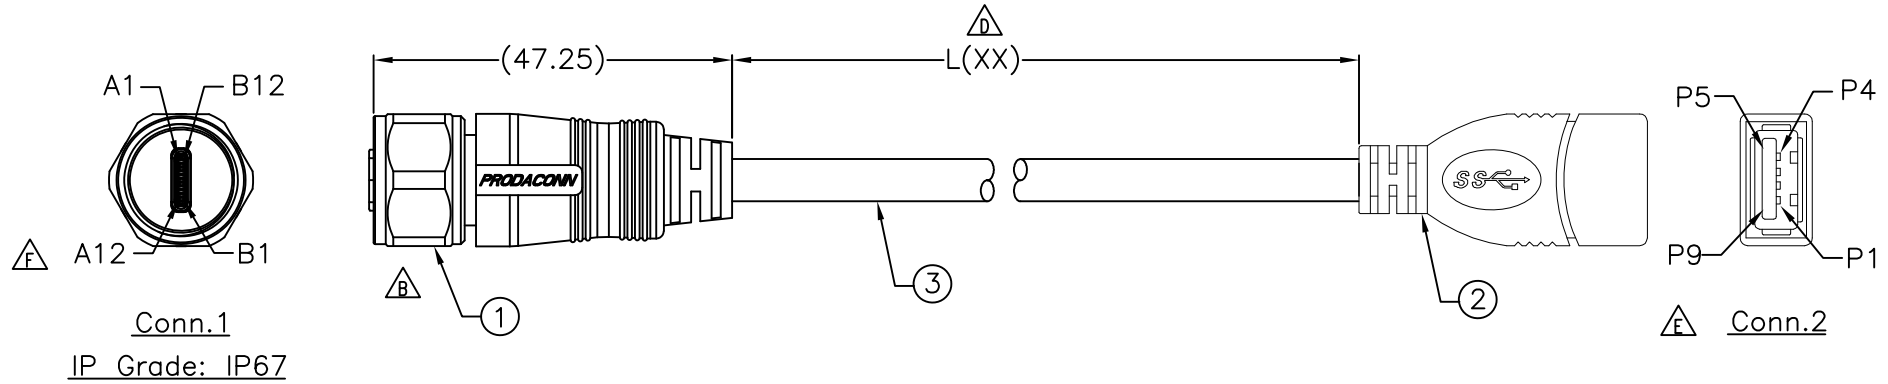

Part No.:
UCM09-PPSB-MXX

Cable Length
01: 01Meter
02: 02Meters
:
10: 10Meters(Max.)

* Cable Length Tolerance:
1M~5M: ±50mm
5.01M~10M: ±80mm

Note:

- ①* Conn.1: Type C Male PG9
Housing: Nylon+GF,Black
Shielding: Copper Alloy,Nickel Plated
Gasket: Silicone,Black Grey
Nut: Copper Alloy,Nickel Plated
- ②* Conn.2: USB 3.0 Jack
- ③* Cable:28/28/24+AEB
PVC Jacket,OD=5.6mm,Black

Shell	Drain	地線	Shell
B10	Orange(SSRXn1-)	橘	5
B11	Purple(SSRXP1+)	紫	6
B12	(GND)		7
A3	Yellow(SSTXn1-)	黃	8
A2	Blue(SSTXp1+)	藍	9
A1	Black(GND)	黑	
A7	White(D-)	白	2
A6	Green(D+)	綠	3
B5	Vconn		
A5	Rd:5.1KΩ(CC)	電阻	
A4/A9/B4/B9	Red(VBUS)	紅	1
A1/A12/B1/B12	(GND)		4
Conn.1	Wire Color		Conn.2
Pin Out			



		All dimension in mm	
		TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.5	REV. F SCALE 1:1
DRAWN BY Delu	APPROVED BY Roy	DATE(Y/M/D) 2024/05/17	PAGE 1/1
PART NO.: UCM09-PPSB-MXX		TITLE TYPE C MALE TO USB3.0 JACK	
CUSTOMER NO:			
THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN			